


Part No. UNITL9XC



Cable Construction & Description

Cable Design Fiber Count	Cable Outside Diameter	Cable weight	Maximum Tensile Load		Maximum Bend Radius	
			Loaded	Loaded	Loaded	Loaded
2 - Fiber	4.8 mm	18.0 kg/km	800 N	200 N	7.2 cm	4.8 cm
4 - Fiber	5.2 mm	23.0 kg/km	1.000 N	300 N	7.8 cm	5.2 cm
6 - Fiber	5.7 mm	31.0 kg/km	1.000 N	300 N	8.5 cm	5.7 cm
8 - Fiber	6.1 mm	36.0 kg/km	1.400 N	440 N	9.1 cm	6.1 cm
12 - Fiber	7.0 mm	50.0 kg/km	1.800 N	600 N	10.5 cm	7.0 cm

Cable Cross Section

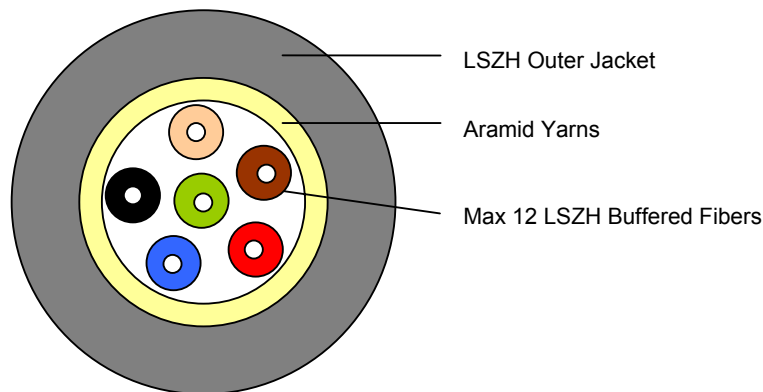

Cable Information

Fiber Buffering and Cable Jacketing Materials: FR - LSZH

Application Temperature Range: -20°C to +60°C

Type of Fiber Core: MCSM

Bending Radius:

Static: 10D (Diameter of cable)

Dynamic: 20D (Diameter of cable)

UNITL9XC

Application

Indoor

Optical Fiber Performance

1. Optical & Geometrical Performance (Single mode 9/125μm)

Core Diameter: 9μm
Cladding Diameter: 125μm
Coating Diameter : 245μm
Buffer Diameter : 900μm

2. Optical & Geometrical Performance (Multi mode 50/125μm)

Core Diameter: 50μm
Cladding Diameter: 125μm
Coating Diameter : 245μm
Buffer Diameter : 900μm

3. Optical & Geometrical Performance (Multi mode 62.5/125μm)

Core Diameter: 62.5μm
Cladding Diameter: 125μm
Coating Diameter : 245μm
Buffer Diameter : 900μm

Optical Transmission Performance

1. Single mode (1310/1550nm) 9/125μm

Maximum Attenuation (db/km) : 1.0/0.75μm
Typical Attenuation (db/km) : 0.5/0.4μm
Maximum Bandwidth (MHz km) : N/Aμm

2. Multi mode (850/1300) 50/125μm

Maximum Attenuation (db/km) : 3.5/1.5μm
Typical Attenuation (db/km) : 3.0/1.0μm
Maximum Bandwidth (MHz km) : 500/500μm

3. Multi mode (850/1300) 62.5/125μm

Maximum Attenuation (db/km) : 3.5/1.5μm
Typical Attenuation (db/km) : 3.0/1.0μm
Maximum Bandwidth (MHz km) : 200/600μm

www.uninetco.com

© 2005 Uninet Co., Ltd. All Rights Reserved.