


## Part No. UCSYPDMXX-Z



### Cable Description

The fibers, either of single-mode or multimode type, are positioned in a loose tube made of a high modulus plastic. The tubes are filled with a water-resistant filling compound. Tubes (and fillers) are stranded around the strength member into a compact and circular cable core. The cable core is filled with the filling compound to protect it from water ingress, over which a thin PE inner sheath is applied. After the CSA is longitudinally applied over the inner sheath, the outer jacket uses a flame-retardant, non-halogenated material with UV and chemical resistance and low-flame spread.

### Cable Cross Section

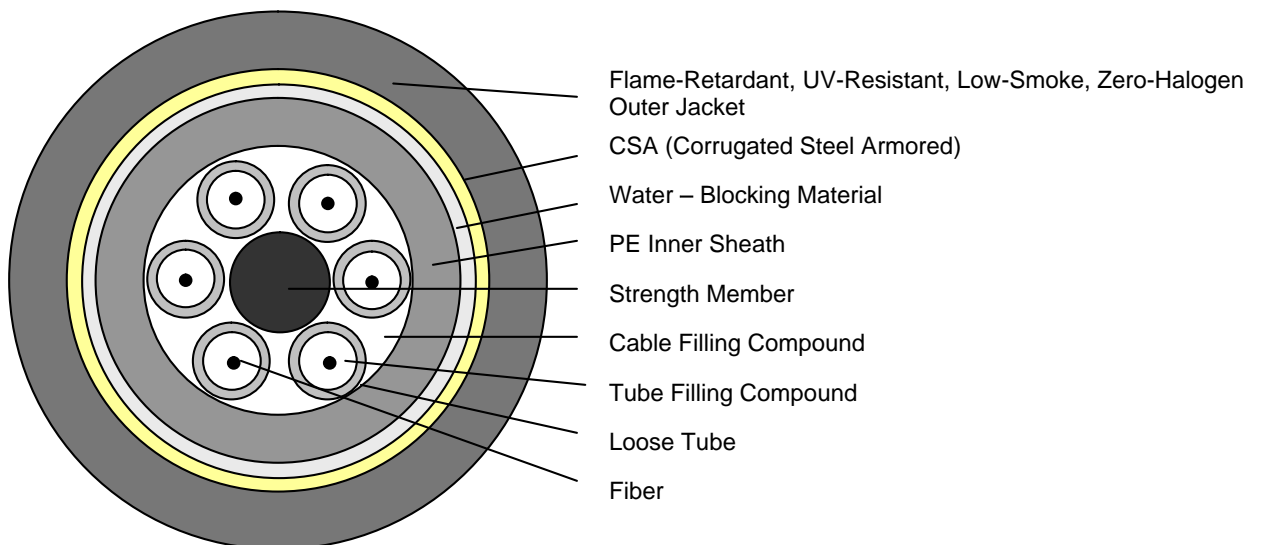

Inter building backbones in aerial , Direct Buried and duct environments

Horizontal intra building and tunnel backbones where limited-smoke, zero-halogen requirements exist

# UCSYPDMXX-Z

## Cable Characteristics

- Accurate fiber excess length ensures good performance of tensile strength and temperature
- High strength loose tube that is hydrolysis resistant and special tube filling compound ensure a critical protection of fiber
- Crush resistance and flexibility.
- The following measures are taken to ensure the cable watertight:
  1. Single steel wire used as the central strength member
  2. Special Loose tube filling compound
  3. Complete cable core filling
  4. APL moisture barrier
  5. CSA moisture-proof
  6. Water-blocking material
- **Bending Radius:**
  - Static: 10D (Diameter of cable)
  - Dynamic: 20D (Diameter of cable)

## Part Number Information

### UCSYPDMXX-Z

X = Type of Fiber Core (as Below Table)

X = Fiber Count (2 ~ 216)

X	Type Of Fiber Core
050	GIMM50
062	GIMM62
550	Max Band 550MM
150	Max Band 150MM
300	Max Band 300MM
100	LCMM100
200	LCMM200
50H	HBGIMM50
62H	HBGIMM62
FL	FLWPSM
09	MCSM
HC	HCLSDSSM
LH	LEAHCPDSSM
DS	DSSM
PD	PDSMM

## Cable Information

Corrugated Steel Armored Cable  
Y Sheath Double Jacket

# UCSYPDMXX-Z

## Cable Parameters

Cable Type (Increased by 2 fiber)	Fiber Count	PE Sheathed Steel Wire mm	Loose Tube Size mm	Tubes	Fillers	Cable Diameter mm	Cable Weight kg/km
UCSYPDMXX-Z	4-6	/	1.5/2.1	1	5	14.0	221
UCSYPDMXX-Z	8-12	/	1.5/2.1	2	4	14.0	221
UCSYPDMXX-Z	14-18	/	1.5/2.1	3	3	14.0	221
UCSYPDMXX-Z	20-24	/	1.5/2.1	4	2	14.0	221
UCSYPDMXX-Z	26-30	/	1.5/2.1	5	1	14.0	221
UCSYPDMXX-Z	32-36	/	1.5/2.1	6	0	14.0	221
UCSYPDMXX-Z	38-42	3.7	1.5/2.1	7	1	15.7	263
UCSYPDMXX-Z	44-48	3.7	1.5/2.1	8	0	15.7	263
UCSYPDMXX-Z	50-60	2.8	2.0/2.6	5	1	15.7	265
UCSYPDMXX-Z	62-72	2.8	2.0/2.6	6	0	15.7	265
UCSYPDMXX-Z	74-84	4.5	2.0/2.6	7	1	16.8	308
UCSYPDMXX-Z	86-96	4.5	2.0/2.6	8	0	16.8	308
UCSYPDMXX-Z	98-108	6.1	2.0/2.6	9	1	18.9	365
UCSYPDMXX-Z	110-120	6.1	2.0/2.6	10	0	18.9	365
UCSYPDMXX-Z	122-132	8.0	2.0/2.6	11	1	21.5	463
UCSYPDMXX-Z	134-144	8.0	2.0/2.6	12	0	21.5	463
UCSYPDMXX-Z	146-216					21.5	448

**Steel Wire:** 2.25 mm

**Strength Long/Short Term :** 1000 / 3000 N

**Crush Resistance:** 3000N / 100 mm



This document was created with Win2PDF available at <http://www.daneprairie.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.